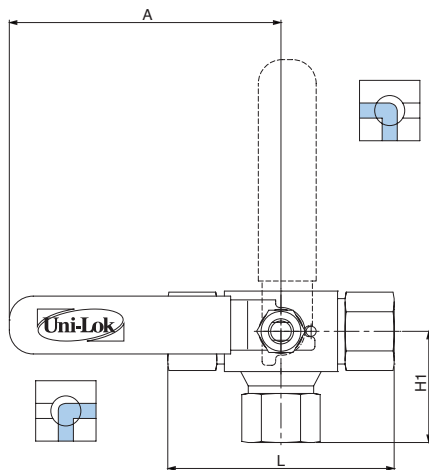
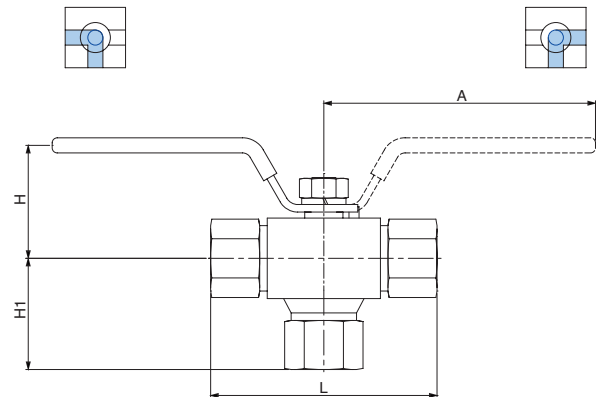


VB6BX series

(3 Way, Switching UNILOK Tube Fittings or Female or Male Threads)

**Side Port Inlet**

1/4 Turn Actuation

**Bottom Port Inlet**

1/2 Turn Actuation

Ordering Information & Dimensions

Part Number	End Connection		Orifice	d Min.	Dimensions (mm)				
	Inlet	Outlet			L	S	H	H1	A
VB6BXB1	U-04T-	1/4" UNILOK	10.0	4.8	92.0	32.0	44.9	53.5	108.0
	U-06T-	3/8" UNILOK		7.1	95.0			55.0	
	U-08T-	1/2" UNILOK		10.0	106.0			57.5	
	F-04N-	1/4" Female NPT		72.0	36.7				
	F-06N-	3/8" Female NPT		75.0	40.2				
	F-08N-	1/2" Female NPT		89.0	44.2				
VB6BXB2	U-12T-	3/4" UNILOK	12.7	12.7	115.0	40.0	55.0	65.5	148.0
	F-08N-	1/2" Female NPT		93.0	49.7				
	F-12N-	3/4" Female NPT		102.0	55.2				
VB6BXB3	U-12T-	3/4" UNILOK	19.0	15.8	125.0	50.0	60.0	70.0	148.0
	U-16T-	1" UNILOK		134.0	76.6				
	F-12N-	3/4" Female NPT		119.0	56.7				
	F-16N-	1" Female NPT		129.0	60.8				

Female ISO7/1 Tapered Threads (PT) are available for all fractional sizes of VB6FX series valves.
Add "R" as a suffix instead of "N".

Bottom and Side Port Entry Valve Ordering Information

To order side port entry valve, replace **B** with **S**

Examples : VB6**B**XB1U-04T-SS, VB6**S**X1U-04T-SS

Dimensions are for reference only and are subject to change without prior notice.