


VU6 series

(Straight or Angle Pattern
Both Female or Male Threads
or Male/Female Thread)

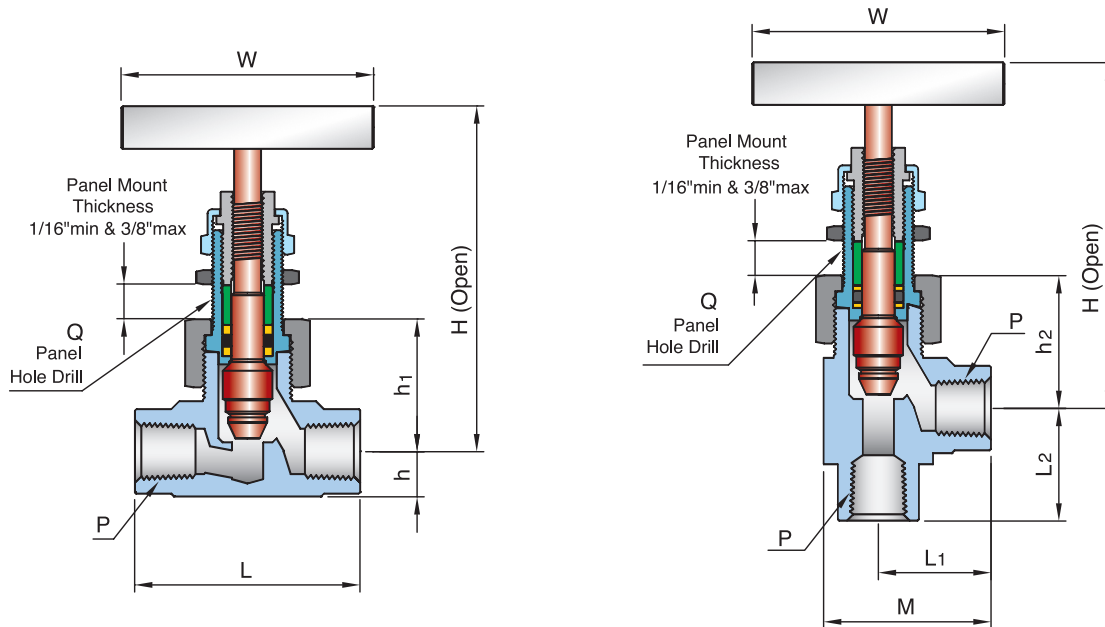

Ordering Information & Dimensions

Part Number	End Connection		Orifice	CV	Dimensions (mm)									
	Inlet	Outlet			L	L ₁	L ₂	M	h	h ₁	h ₂	H(open)	W	Q
VU61	F-02N-	1/8" Female NPT	4.0	0.35	50.8	23.0	25.4	32.6	9.6	27.8	32.6	77.8	45.0	15.1
	F-04N-	1/4" Female NPT			52.4	26.2	23.0	32.6						
	M-04N-	1/4" Male NPT			50.8	25.4	25.4	35.0						
	MF-04N-	1/4" Male NPT 1/4" Female NPT			52.4	23.0	25.4	32.6						
VU62	F-04N-	1/4" Female NPT	6.4	0.86	57.2	25.4	28.6	38.1	12.7	34.1	37.3	93.7	64.0	19.9
	F-06N-	3/8" Female NPT			57.2	25.4	28.6	38.1	12.7	34.1	37.3			
VU63	F-08N-	1/2" Female NPT	11.0	2.20	79.4	33.3	39.7	50.8	15.9	46.0	50.8	121.5	89.0	26.2
	F-12N-	3/4" Male NPT			82.6	-	-	-	19.9	48.4	-			
	F-16N-	1" Male NPT			92.1	-	-	-	25.4	54.0	-			
	MF-08N-	1/2" Male NPT 1/2" Female NPT			79.4	33.3	39.7	50.8	15.9	46.0	50.8			
	MF-12N-	3/4" Male NPT 3/4" Female NPT			82.6	-	-	-	19.9	48.4	-			
	MF-16N-	1" Male NPT 1" Female NPT			92.1	-	-	-	25.4	54.0	-			

ISO7/1 Tapered Threads (PT) are available for all fractional sizes of VU6 series valves.
Add "R" as a suffix instead of "N".

Dimensions are for reference only and are subject to change without prior notice.