


Stub Tube to Pipe

Female Adapter

UFA

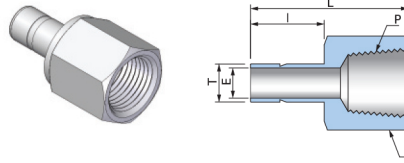

Connects Fractional Kor-Lok Port to Male NPT Thread

Part No.	Tube OD T		P NPT	Dimensions (mm)				
	inch	mm		E Min.	h		l	L
				inch	mm			
UFA-02T02N	1/8	3.17	1/8	1.8	9/16	14.28	13.5	31.5
UFA-02T04N	1/8	3.17	1/4	1.8	3/4	19.05	13.5	34.6
UFA-03T02N	3/16	4.76	1/8	3.0	9/16	14.28	14.2	32.0
UFA-03T04N	3/16	4.76	1/4	3.0	3/4	19.05	14.2	35.8
UFA-04T02N	1/4	6.35	1/8	4.3	9/16	14.28	16.2	33.0
UFA-04T04N	1/4	6.35	1/4	4.3	3/4	19.05	16.2	37.1
UFA-04T06N	1/4	6.35	3/8	4.3	7/8	22.22	16.2	39.4
UFA-04T08N	1/4	6.35	1/2	4.3	1-1/16	26.98	16.2	43.7
UFA-05T02N	5/16	7.93	1/8	6.4	9/16	14.28	16.8	34.3
UFA-05T04N	5/16	7.93	1/4	6.4	3/4	19.05	16.8	37.6
UFA-06T02N	3/8	9.52	1/8	7.0	9/16	14.28	17.8	34.3
UFA-06T04N	3/8	9.52	1/4	7.0	3/4	19.05	17.8	38.1
UFA-06T06N	3/8	9.52	3/8	7.0	7/8	22.22	17.8	40.4
UFA-06T08N	3/8	9.52	1/2	7.0	1-1/16	26.98	17.8	46.7
UFA-08T04N	1/2	12.70	1/4	9.3	3/4	19.05	23.8	43.4
UFA-08T06N	1/2	12.70	3/8	9.3	7/8	22.22	24.3	45.4
UFA-08T08N	1/2	12.70	1/2	10.0	1-1/16	26.98	23.5	52.3
UFA-10T06N	5/8	15.87	3/8	12.0	7/8	22.22	24.7	48.3
UFA-10T08N	5/8	15.87	1/2	12.7	1-1/16	26.98	24.4	53.2
UFA-10T12N	5/8	15.87	3/4	12.0	1-1/4	31.75	24.7	55.4
UFA-12T08N	3/4	19.05	1/2	15.0	1-1/16	26.98	24.7	53.8
UFA-12T12N	3/4	19.05	3/4	15.0	1-1/4	31.75	24.7	55.4
UFA-12T16N	3/4	19.05	1	15.0	1-5/8	41.27	24.7	58.4
UFA-14T12N	7/8	22.22	3/4	17.0	1-1/4	31.75	26.7	57.2
UFA-16T12N	1	25.40	3/4	20.0	1-1/4	31.75	31.0	60.7
UFA-16T16N	1	25.40	1	22.0	1-5/8	41.27	31.0	68.8
UFA-20T20N	1-1/4	31.75	1-1/4	27.0	2-1/8	53.98	40.0	77.7
UFA-24T24N	1-1/2	31.75	1-1/2	33.0	2-3/8	60.33	51.5	88.9
UFA-32T32N	2	38.10	2	45.0	2-7/8	73.03	68.4	107.4

ISO Tapered threads are available for all fractional UMA. To order, add "R" as a suffix instead of "N".

Connects Metric Kor-Lok Port to Male ISO Tapered Thread

Part No.	Tube OD T	P (PT)	Dimensions (mm)			
	mm		E Min.	h mm	l	L
UFA-M03T02R	3	1/8	1.8	14.28	13.2	31.2
UFA-M06T02R	6	1/4	4.1	14.28	16.2	32.5
UFA-M06T04R	6	1/4	4.1	19.05	16.2	37.1
UFA-M08T04R	8	1/4	5.5	19.05	17.7	37.6
UFA-M10T04R	10	1/4	7.0	19.05	17.8	38.1
UFA-M10T06R	10	3/8	7.0	22.22	17.8	40.1
UFA-M10T08R	10	1/2	7.1	26.98	17.8	46.5
UFA-M12T04R	12	1/4	9.0	19.05	24.3	43.7
UFA-M12T06R	12	3/8	9.0	22.22	23.5	46.0
UFA-M12T08R	12	1/2	8.9	26.98	24.3	52.3
UFA-M18T12R	18	3/4	14.0	31.75	24.9	54.8

NPT threads are available for all metric UMA. To order, add "N" as a suffix instead of "R".

Dimensions are for reference only and are subject to change without prior notice.
E is minimum opening. F, G and L are typical finger tight.